


# I 無鉛電子照射PVC隔離線 Irradiated PVC (Lead Free) Shielded Wire

UL Style 1571, 80°C 30V

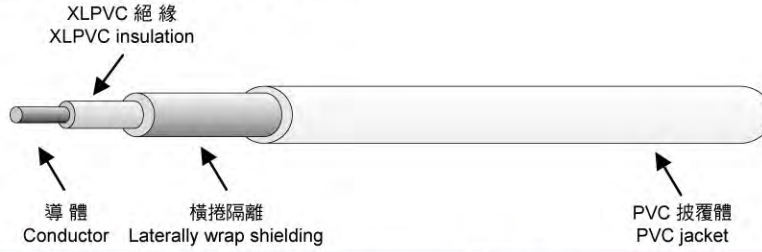

導體			絕緣體		橫捲隔離		披覆體		最大 導體電阻	絕緣耐壓	標準單長
Conductor			Insulation		Shielding		Jacket				
Size	Composition	Diam	Thick	Diam	Wrap Wire	Diam	Thick	Diam	Cond. Resist.	Diel. Strength	Stand. Length
AWG	No/mm	mm	mm	mm	mm	mm	mm	mm	(20°C) Ω/km	ACV/ 1 min	FT
36	7/0.05	0.15	0.15	0.45	0.05	0.55	0.20	0.95	1490	500	2000 或 1000
32	7/0.08	0.24	0.17	0.58	0.08	0.74	0.20	1.14	624		
30	7/0.102	0.30	0.25	0.80	0.10	1.00	0.22	1.44	410		
28	7/0.127	0.38	0.25	0.88	0.10	1.08	0.25	1.58	248		
26	7/0.16	0.48	0.25	0.98	0.10	1.18	0.30	1.78	152		
24	7/0.203	0.61	0.25	1.11	0.10	1.31	0.30	1.91	92.3		

UL Style 2851, 80°C 30V



導體			絕緣體		心數	橫捲隔離		披覆體		最大 導體電阻	絕緣耐壓	標準單長
Conductor			Insulation			Shielding		Jacket				
Size	Composition	Diam	Thick	Diam	Cores	Wrap Wire	Diam	Thick	Diam	Cond. Resist.	Diel. Strength	Stand. Length
AWG	No/mm	mm	mm	mm		mm	mm	mm	mm	mm	(20°C) Ω/km	ACV/ 1 min
32	7/0.08	0.24	0.17	0.58	2	0.08	1.32	0.22	1.76	630	500	1000
32	7/0.08	0.24	0.17	0.58	4	0.08	1.56	0.25	2.06	630		
30	7/0.102	0.30	0.25	0.80	2	0.10	1.80	0.25	2.30	415		
30	7/0.102	0.30	0.25	0.80	4	0.12	2.20	0.30	2.80	415		
28	7/0.127	0.38	0.25	0.88	2	0.10	1.96	0.27	2.50	250		
28	7/0.127	0.38	0.25	0.88	4	0.12	2.35	0.30	2.95	250		
26	7/0.16	0.48	0.25	0.98	2	0.10	2.16	0.33	2.82	153		
24	7/0.203	0.61	0.25	1.11	2	0.10	2.42	0.33	3.08	93.2		