
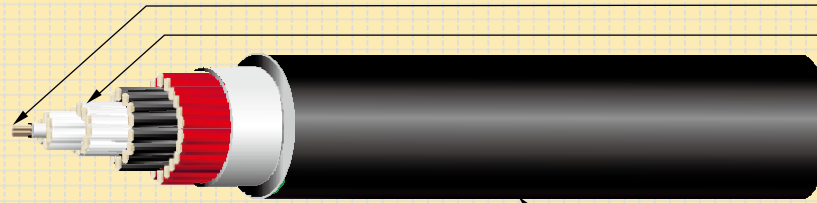


## 600V PVC-PVC Control Cable (CVV)

CNS 4898 C2064

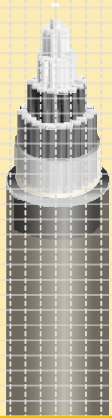

Conductor  
PVC Insulation

PVC Sheath

Number Of Cores	Conductor			Thickness of Insulation	Thickness of Sheath	Approx. Overall Diameter	A.C. Voltage Test	Max. Conductor D.C. Resistance (20°C)	Min. Insulation Resistance (20°C)	Approx. Cable Weight	Standard Length
	Nominal Cross-section Area	Nominal Dia. and number of wires	Approx. Diameter								
	mm <sup>2</sup>	No./mm	mm	mm	mm	mm	V/1 min.	Ω/km	MΩ-km	kg/km	m
5	1.25	7/0.45	1.35	0.8	1.5	11.5	2000	16.8	50	165	300
	2.0	7/0.6	1.8	0.8	1.5	13.0	2000	9.42	50	225	300
	3.5	7/0.8	2.4	0.8	1.5	14.5	2000	5.30	50	320	300
6	1.25	7/0.45	1.35	0.8	1.5	12.5	2000	16.8	50	185	300
	2.0	7/0.6	1.8	0.8	1.5	14.0	2000	9.42	50	260	300
	3.5	7/0.8	2.4	0.8	1.5	15.5	2000	5.30	50	375	300
7	1.25	7/0.45	1.35	0.8	1.5	12.5	2000	16.8	50	195	300
	2.0	7/0.6	1.8	0.8	1.5	14.0	2000	9.42	50	280	300
	3.5	7/0.8	2.4	0.8	1.5	15.5	2000	5.30	50	410	300
8	1.25	7/0.45	1.35	0.8	1.5	13.5	2000	16.8	50	220	300
	2.0	7/0.6	1.8	0.8	1.5	15.0	2000	9.42	50	315	300
	3.5	7/0.8	2.4	0.8	1.5	17.0	2000	5.30	50	465	300
10	1.25	7/0.45	1.35	0.8	1.5	15.5	2000	16.8	50	280	300
	2.0	7/0.6	1.8	0.8	1.5	17.5	2000	9.42	50	405	300
	3.5	7/0.8	2.4	0.8	1.5	19.5	2000	5.30	50	595	300
12	1.25	7/0.45	1.35	0.8	1.5	16.0	2000	16.8	50	320	300
	2.0	7/0.6	1.8	0.8	1.5	18.0	2000	9.42	50	450	300
	3.5	7/0.8	2.4	0.8	1.5	21.0	2000	5.30	50	675	300
15	1.25	7/0.45	1.35	0.8	1.5	17.0	2000	16.8	50	365	300
	2.0	7/0.6	1.8	0.8	1.5	19.0	2000	9.42	50	530	300
	3.5	7/0.8	2.4	0.8	1.5	22.0	2000	5.30	50	790	300
20	1.25	7/0.45	1.35	0.8	1.5	19.0	2000	16.8	50	465	300
	2.0	7/0.6	1.8	0.8	1.5	22.0	2000	9.42	50	670	300
	3.5	7/0.8	2.4	0.8	1.6	25.0	2000	5.30	50	1050	300
30	1.25	7/0.45	1.35	0.8	1.6	23.0	2000	16.8	50	675	300
	2.0	7/0.6	1.8	0.8	1.7	26.0	2000	9.42	50	1030	300
	3.5	7/0.8	2.4	0.8	1.8	30.0	2000	5.30	50	1600	300